
PRECISION DOOR SERVICE

CHARIOT COURT



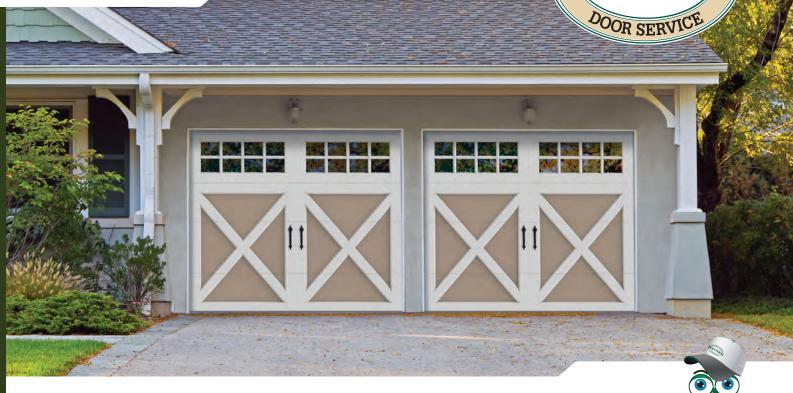

Distinctly defined. The Chariot Court collection adds increased curb appeal to your home with 18 highly defined carriage house garage door designs. Built with durable composite overlay trim and insulated steel-backed sections, these garage doors provide energy efficiency, noise reduction and innovative design to your home.

PANEL DESIGNS

NOT AVAILABLE WITH WINDOWS



Columbia



























AVAILABLE WITH WINDOWS





Grissom

Fairglen

Muirfield

Dixie

Nova




Thoreau

www.PrecisionDoor.net · 866-443-7672




DESIGNS AVAILABLE WITH WINDOWS


LYNWOOD (LB)*

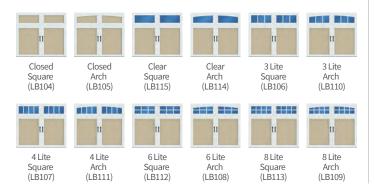

PINEDA (PT)



BARNA (BB)

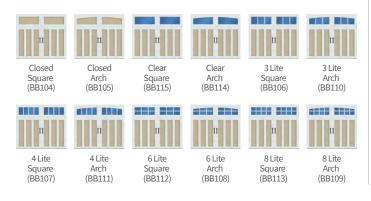

KENNEDY (KT)



SHERWOOD (SB)



^{*}Available in 6' width (no window options).


RUTLEDGE (RM)





DESIGNS NOT AVAILABLE WITH WINDOWS

COLUMBIA (CT)*



Closed Square (CT104)



Arch (CT105)

ABBEY (AL)*



Closed Square (AL104)



Closed Arch (AL105)

ROCKVILLE (RW)†



Closed Square (RW104)

GRISSOM (GB)*



Closed Square (GB104)

Closed

Arch (GB105)

FAIRGLEN (FF)



Closed Square (FF104)



Closed Arch (FF105)

BAYVIEW (BL)†



Closed Square (BL104)

THOREAU (TW)



Closed Square (TW104)

Closed Arch (TW105)

MUIRFIELD (MT)



Closed Square (MT104)



Closed Arch (MT105)

MARINA (MG)†



Closed Square (MG104)

DIXIE (DB)



Closed Square (DB104)



Arch (DB105)

NOVA (NB)



Closed Square (NB104)



Closed Arch (NB105)

ATLANTIS (AR)†



Square (AR104)

DECORATIVE HARDWARE

ALUMINUM





Aluminum hinges with clavos not recommended for arch openings.

STAMPED STEEL



MAGNETIC ABS VINYL





2-sided adhesive disks required when applying to overlay; must be purchased separately.

^{*}Available in 6' width (no window options).

[†]Closed Square only.



SPECIFICATIONS

Insulation ¹	Polystyrene
R-Value ²	6.48
Door Thickness	2"
Steel Thickness	27/27 Gauge
Wind Load Option ³	~
Paint Finish Warranty	Lifetime
Hardware Warranty⁴	5 Years

- 1 Insulation has passed self-ignition, flamespread and smoke developed index fire testing.
- 2 Calculated door section R-value is in accordance with DASMA TDS-163.
- 3 It is your responsibility to make sure that your garage door meets local building codes.
- 4 Hardware warranty includes springs, cables, drums, rollers, and bearings.

For complete warranty details, contact your local Precision Door Service.

COLOR OPTIONS

Actual paint colors may vary from samples shown.



White (W1)



White (A1)





Wicker Tan/ White (K1)

Sandtone/ White (S1)

Door, window, and overlay can be painted using 100% acrylic exterior latex paint with a Light Reflective Value (LRV) of 8 or higher. Contact paint manufacturer for LRV ratings. Painting your garage door voids the paint finish warranty.

CONSTRUCTION



Steel + Insulation + Steel 2" thick door with polystyrene insulation and steel interior

Built with 5/8" composite overlay trim

WINDOWS



- Large rectangular or arched window designs in 24" top sections
- 5/8" thick decorative window grilles with coped edges
- ✓ Available in double-strength clear, obscure* or clear insulated* glass

*Price upcharge applies.

OVERLAY TRIM



- √ 5/8" thick composite overlay trim of reclaimed wood fiber and thermoplastic polymer
- ✓ Coped edge design

- ✓ Sustainable, green building material
 ✓ Resists rot, decay, and fungal growth
 ✓ Won't flake, blister, peel, pit or corrode

